



Discharge Consent (068/12/3) Reporting

June to August 2018

Author

██████████ – Dalradian Gold Ltd

Date

28th September 2018

TABLE OF CONTENTS

1.0 Introduction	1
2.0 Summary of operations during the reporting period	1
3.0 Sampling locations, protocol and laboratories	1
4.0 Results	3
4.1 Quality Assurance/Quality Control	3
4.1.1 Chain of Custody and confirmation of parameter analysis	3
4.1.2 Holding times	3
4.1.3 Field Blanks	3
4.1.4 Duplicate Samples	4
4.1.5 Laboratory internal QA/QC	4
4.1.6 Summary	5
4.2 Factual Presentation of Data	5

Appendix A – Presentation of Water Quality Results

Appendix B – Laboratory Certificates

Appendix C – YSI MultiParameter Meter Calibration Certificate

1.0 INTRODUCTION

This report has been prepared by Dalradian Gold Ltd. (DGL) in response to Condition 1.I. of Discharge Consent 068/12/3, which requires quarterly water quality reporting. The consent relates to discharge of site drainage water (at Irish Grid Reference H 5707 8690) arising from the DGL advanced exploration project at Curraghinalt. The site is situated approximately 8 km to the east of the village of Gortin, County Tyrone, Northern Ireland, BT79 7SF.

2.0 SUMMARY OF OPERATIONS DURING THE REPORTING PERIOD

DGL have progressed advanced exploration at the Curraghinalt site. The work progressed under Planning Permission K/2014/0246/F, and has been aimed at collecting information that will support a Feasibility Study and an Environmental Impact Assessment to allow for development of a full mine.

Water discharged via the consent during the reporting period has derived from natural groundwater drainage to the exploration adit and runoff water from various components of the site that has resulted from incident rainfall. Following capture and management of these sources, treatment prior to discharge at the consent location has included passage through a settlement tank, oil interceptor, lamella clarifier (for further sediment removal), and a pH adjustment tank.

DGL informed the Northern Ireland Environment Agency (NIEA) of the intention to commence the site discharge on 3 December 2014. This document represents the 15th quarterly discharge consent report.


3.0 SAMPLING LOCATIONS, PROTOCOL AND LABORATORIES

Five surface water sample locations are required to be sampled monthly as part of the Discharge Consent. These have been listed below as Discharge Consent Sample 1 (DCS1) to Discharge Consent Sample 5 (DCS5) and are also presented on Figure 1.

- DCS1 - Immediately upstream of the confluence of the site discharge point and Curraghinalt Burn;
- DCS2 - Site discharge point;
- DCS3 - 5 m downstream of the confluence of the site discharge point and Curraghinalt Burn;
- DCS4 - Immediately upstream of the confluence of Curraghinalt Burn and the Owenkillew River; and
- DCS5 - 5 m downstream of the confluence of the Curraghinalt Burn and the Owenkillew River.

DGL has also added 2 more samples as part of QA/QC. The sample ID's are:

- DCS6 – a blank sample consisting of deionised water; and
- DCS7 – a duplicate of any sample between DCS1 and DCS5.

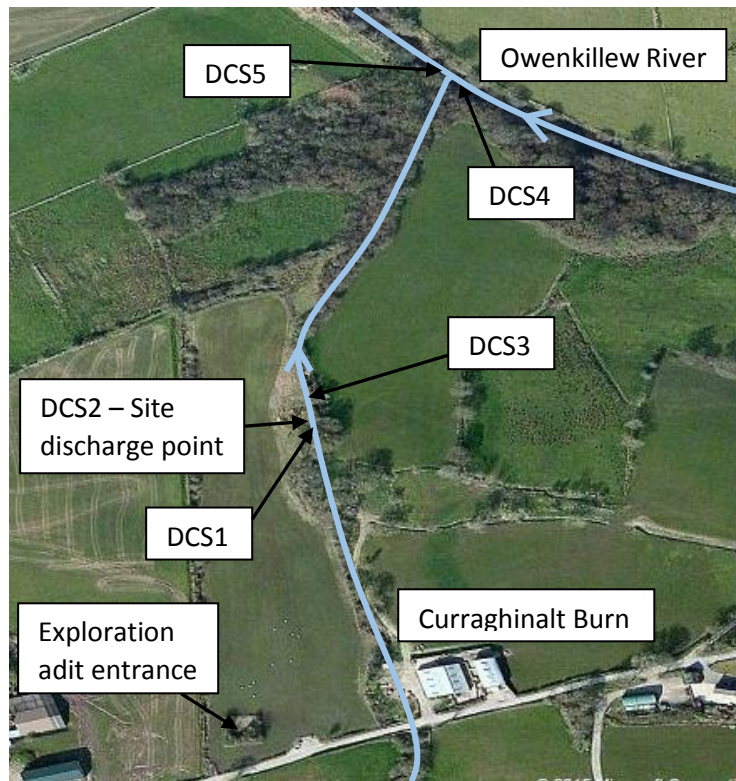

100m – approx. scale

Figure 1: Site map (Bing Maps) showing discharge consent sample locations

All surface water samples are collected according to protocols described in the DGL Surface Water Sampling Procedure¹. To help ensure quality results, care is taken not to disturb stream bed sediments upstream of the sampling point and prior to sampling. Samples are collected at all locations by a DGL Field Technician wearing a fresh pair of nitrile gloves and from the flowing stream of water to minimise any risks of contamination. All sample bottles are laboratory supplied and are filled to capacity at source.

In accordance with best practice, field filtration for dissolved parameters is undertaken on site using a syringe and attached 0.45µm filter, and these samples are associated with a nitric acid (HNO₃) preservative to thereafter stabilise dissolved metals in solution. All laboratory analytical services during the quarter, including supplementary Quality Assurance/Quality Control (QA/QC) testing, have been provided by [REDACTED].

Samples are placed in a cooler with ice, secured with sample packaging and accompanied by a completed Chain of Custody (CoC) Form, and shipped directly to [REDACTED] in [REDACTED] for analysis. [REDACTED] are accredited by the United Kingdom Accreditation Service (UKAS) to 17025 standard, and UKAS monitor and externally audit the laboratory.

DGL have also been working to include the measurement of pH in the field at each sample location. Regular calibration of the instrument used is undertaken on site using both pH 4.01 and pH 7.01 buffer solutions and in accordance with DGL MultiParameter Meter Calibration Procedure². During readings,

¹ Dalradian Gold Ltd. 2013 & 2015. Surface Water Sampling Procedure.

² Dalradian Gold Ltd. 2013 & 2015. MultiParameter Meter Calibration Procedure.

the pH probe is fully immersed at all times in the flowing stream of water and up until stabilisation occurs³.

4.0 RESULTS

During this reporting period DGL have collected a total of 3 rounds of water samples from the discharge consent locations. This number of samples meets that required by the consent during the period. Sampling was undertaken on the 11th of June, 9th of July and the 6th August 2018.

QA/QC checks and factual reporting against the consent water quality thresholds for the discharge point are presented in the following sub-sections. Water quality results and thresholds are summarised in Appendix A, and all laboratory certificates are presented in Appendix B.

4.1 Quality Assurance/Quality Control

A number of QA/QC measures have been applied to water samples taken at all sites. A factory calibrated certificate for the YSI Professional Series Multiparameter probe used to measure pH in the field is provided in Appendix C.

4.1.1 Chain of Custody and confirmation of parameter analysis

A chain of custody (CoC) form was completed on each day of sampling. The CoC forms document possession of the samples from the time of sample collection to reception at the lab; provide primary instruction to the lab on the parameters to be analysed; and provide sample information relevant to the lab, such as sample name and sample date and time. Following each sampling event and prior to submission to the lab, the CoC was reviewed and checked for errors. In the events covered within the period there are no issues to report in this respect.

4.1.2 Holding times

In order to ensure holding times were not exceeded, DGL shipped samples directly to the laboratory. Certificates presented in Appendix B demonstrate that all samples were received by [REDACTED] the next day after sampling. Testing is recorded on CoC forms to have been scheduled for a standard 10 day turnaround time on all occasions.

4.1.3 Field Blanks

A total of three field blanks have been collected during the reporting period to assess potential contamination due to the sampling environment (e.g., dust getting into the sample bottle). Analysis of field blanks was undertaken by the laboratory alongside the specified water chemical analysis. Field blank results include total ambient conditions during sampling, but can also potentially incorporate bias due to laboratory methods (e.g., low-level constituents remaining in analytical equipment from a prior highly contaminated sample from another site) that are assessed by laboratory method blanks. The field blanks incorporated deionised water which theoretically should return no measurable values throughout the parameters analysed (with the omission of pH) unless there has been a source of contamination during sampling.

All determinants in three blank samples were below laboratory detection limits apart from BOD on the 6th of August which had a result of 2 mg/L; or twice the detection limit (Appendix A). This low level detection is considered to be acceptable.

³ Dalradian Gold Ltd. 2013 & 2015. MultiParameter Meter Sampling Procedure.

4.1.4 Duplicate Samples

Three duplicate samples were collected during the reporting period, and all from the discharge point (DCS2). Analysis of all duplicate samples was undertaken by [REDACTED] and therefore alongside the remaining batch.

The measure of the reproducibility or precision of the chemical analysis has been quantified by calculating the Relative Percentage Difference (RPD) between parameter concentrations on the split sample submitted as a blind duplicate. The RPD has been calculated as follows:

$$RPD\% = \frac{|S - D|}{\frac{1}{2}(S + D)} \times 100$$

Where:

RPD = Relative Percentage Difference

S = Sample value of parameter; and

D = Duplicate value of parameter

Theoretically, duplicate samples should have identical chemical concentrations (i.e., RPD = 0). However, due to factors such as sample matrix heterogeneity, natural variations or variations due to sample collection, handling or analysis, a variation in chemical concentration may occur (i.e., RPD greater than 0).

It should be noted that the reproducibility of replicate analyses at concentrations near the method detection limit (MDL) can be poor, resulting in RPD values of greater than the desirable limits. Therefore, for duplicate concentrations greater than five times the detection limit, a relative percent difference value of $\pm 20\%$ is considered acceptable⁴. Given these considerations, for duplicate concentrations less than five times the detection limit, RPD has not been calculated.

An RPD value greater than the above project objectives suggests variability has been introduced through sample collection, sample handling, or sample analysis. Of the analysis undertaken dissolved nickel on the 9th July, and dissolved chromium and dissolved nickel on the 6th of August were found to be outside the acceptable RPD. However, all concentrations are well below any consent limits. This discrepancy is considered to most likely be due to a small variation in sampling and analytical procedure.

4.1.5 Laboratory internal QA/QC

[REDACTED] report data only if the laboratory is confident that the results are a true reflection of the samples analysed, and data is only reported as accredited when all the requirements of their Quality System have been met. Any failure in the Quality System is fully investigated and documented as deviating samples on certificates issued. If samples are received in a condition inappropriate to the requested analyses, for example if they are dispatched in inappropriate containers or at a temperature not commensurate with the requested analysis, any test results that may be compromised will be highlighted in a deviating samples report.

On all laboratory certificates returned, all samples sent for analysis were scheduled upon receipt. In July's sampling round it was found that all samples were received at a temperature above 9°C. There

⁴ Zeiner, S.T. 1994. Realistic Criteria for the Evaluation of Field Duplicate Field Results. Proceedings of Superfund XV, November 29-December 1, 1994. Sheraton Washington Hotel, Washington, D.C.

were no other deviating samples and there is no discernible bias between results from this monitoring event and the remaining data set.

4.1.6 Summary

As detailed above, there are no major QA/QC concerns regarding the dataset presented. Duplicate and blank samples collected also indicate a high level of data quality. There were no detections in field blanks that resulted in no apparent bias in the water quality results.

4.2 Factual Presentation of Data

All water quality results are presented in summary for each location in Appendix A. This includes a comparison of concentrations from the discharge point location (DCS2) against specific threshold values detailed within the consent.

During the reporting period, all three sample results from DCS2 are below the threshold values presented within the consent for all parameters.

Water quality obtained from the Curraghinalt Burn during the period can be summarised as follows:

- Total suspended solids were below detection (<10 mg/L) in all cases;
- BOD concentrations ranged from below detection (<1 mg/L) to 2 mg/L;
- Laboratory measured pH varies between a minimum of 6.22 pH units (recorded at the upstream location) and a maximum of 7.99 pH units (recorded at the downstream location);
- Dissolved zinc concentrations varied between a minimum concentration of 2.9 µg/L found at the downstream location and 9.3 µg/L found at the downstream location;
- Dissolved arsenic concentration ranged from below detection at <0.9 µg/L to 3.1 µg/L;
- Dissolved lead concentrations were below detection at <0.4 µg/L (at both the downstream and upstream locations);
- Oil or grease has not been visible at the sample locations;
- The maximum dissolved iron concentration has been determined at 3.451 mg/L at the upstream location; and
- The maximum total hardness has been recorded as 146 mg/L at the downstream location.

Water quality obtained from the Owenkillew River during the period can be summarised as follows:

- Total suspended solids were below detection (<10 mg/L) in both the upstream and downstream locations;
- BOD concentrations varied from below detection (<1 mg/L) to 3 mg/L;
- Laboratory measured pH varies between a minimum of 6.1 pH units (recorded at the upstream location) and a maximum of 7.74 pH units (recorded at the upstream location);
- Oil or grease has not been visible at the sample locations;
- The maximum dissolved iron concentration has been determined at 1.176 mg/L at the downstream location; and
- Dissolved zinc concentrations varied from below detection (<1.5 µg/L) in the upstream location to 4.6 µg/L in the upstream location;
- The maximum total hardness has been recorded as 48 mg/L at the downstream location.

Appendix A
Presentation of Water Quality Results

DCS2 - Discharge Point

Parameter	Discharge Consent Threshold	Detection limit (typical)	27/11/2014	16/12/2014	18/12/2014	14/01/2015	04/02/2015	Duplicate/DCS7	11/02/2015	Duplicate/DCS7	Duplicate	23/03/2015	26/03/2015	Duplicate	23/04/2015
Total Suspended Solids	50	10	3	11	18	22	6	<3	13	11	8	3	27	31	7
Biochemical Oxygen Demand	10	1	<1	<1	<1	1.58 [#]	1.76 [#]	1.61 [#]	1.03 [#]	<1	<2	<2	1.23 [#]	<2	1.04 [#]
pH	>6 & <9	-	7.38	7.47	7.08	7.18	7.34 (7.00)	6.92	7.5 (7.48)	7.68	7.8	7.7	7.83 (8.54)	7.8	7.83
Total zinc ⁴	33.8	3	<18	<18	30	30	<18	<18	<18	<18	11.47	10.21	<18	30.07	<18
Dissolved zinc	490	1.5													
Dissolved mercury ⁴	1.7	0.5	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.2	<0.2	<0.1	<0.2	<0.1
Dissolved cadmium ⁴	0.7	0.03	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.09	<0.09	<0.6	<0.09	<0.6
Dissolved iron ⁴	3.9	0.0047	<0.23	<0.23	<0.23	<0.23	<0.23	0.34	<0.23	<0.23	0.04908	0.03045	<0.23	0.8087	<0.23
Dissolved copper ⁴	16.2	3	12	10	<9	<9	<9	<9	<9	<9	9.065	7.101	10	2.202	<9
Dissolved chromium ²	8.1	0.2	<2	<2	2	7	2	<2	<2	<2	<0.68	<0.68	<2	<0.68	<2
Chromium VI	N/A	2	<5	<5	<5	9	<5	<5	<5	<5			<5		<5
Chromium III	N/A	2	<30	<30	<30	<30	<30	<30	<30	<30			<30		<30
Dissolved nickel ³	20	0.2	<3	<3	6	14	10	<3	14	11	12.01	6.544	5	0.833	7
Dissolved arsenic ¹	50	0.9	1	<1	<1	3	4.8	1.1	5.1	4.3	6.23	2.971	7.9	1.929	2.5
Dissolved lead ³	7.2	0.4	<6	<6	<6	<6	<6	<6	<6	<6	<0.173	<0.173	<6	<0.173	<6
Total hardness as CaCO3	N/A	1	123	137	132	135	137	24.1	150	146	139	136	106	114	147
Visible oil or grease	N/A	N/A	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes:

pH values presented in pH units. Values in brackets are field pH measurements. Total Suspended Solids, Biochemical Oxygen Demand, Total hardness & Dissolved iron concentrations are presented in mg/L, all other parameters are in µg/L.

^{1,2&3} Threshold from The Water Framework Directive (Priority Substances and Classification) Regulations (Northern Ireland) 2011

¹ Annual mean value presented for 'Good Standard for rivers and freshwater lakes'

² Annual mean environmental standard for chromium III (4.7µg/L) plus annual mean environmental standard for chromium VI (3.4µg/L) presented for 'Good Standard for rivers and freshwater lakes'




³ Annual mean environmental standard (AA-EQS) value presented for priority substance and its compounds for all rivers and lakes

⁴ Department Specific

BOD over diluted, therefore result indicative only

^Δ Container with headspace

Exceedance of threshold
Duplicate sample

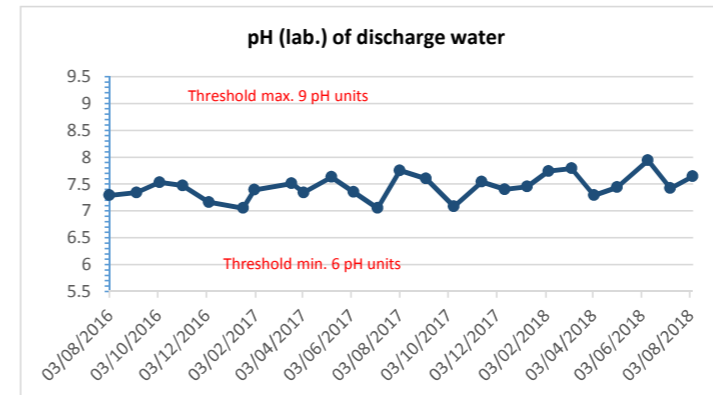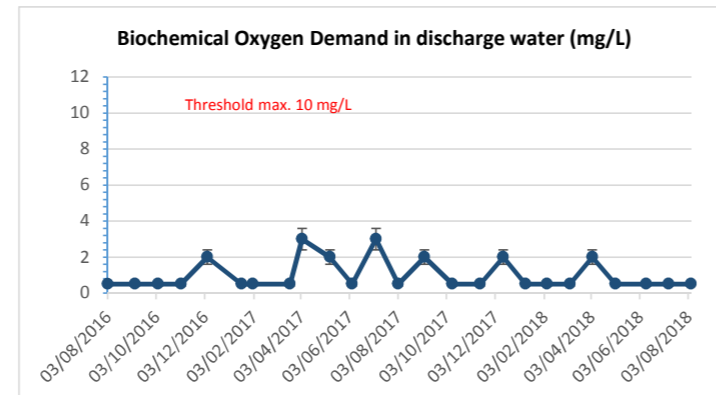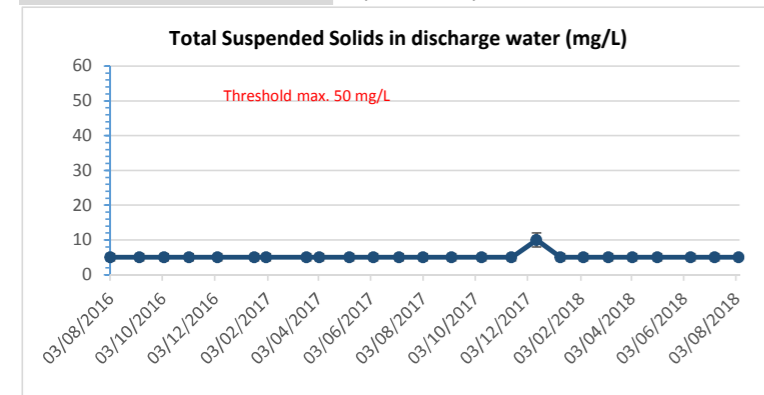

Notes:

Half detection limit used for graphing when parameter less than detect

Error bars of 20% to reflect limit of acceptable duplicate reproducibility

Duplicate	28/05/2015	28/05/2015	02/06/2015	30/07/2015	04/08/2015	Duplicate	02/09/2015	28/09/2015	Duplicate	01/10/2015	22/10/2015	Duplicate	05/11/2015	Duplicate	09/12/2015	Duplicate	06/01/2016	Duplicate	03/02/2016	Duplicate	03/02/2016 Retest
10	23	36	39	<10	14	23	11	<10	12	12	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	-
<2	1.71 [#]	1.49 [#]	<1	<1	1	8	3	3	3	2	2	1	1	<1	<1	1	<1	<1	<1	<1	-
7.9	8.29	8.27	7.82	7.98	7.69 (8.41)	7.7	8.09	7.74	7.73	8.96	7.35	7.14	7.85 (7.53)	8.06	7.76 (7.28)	8.07	7.58 (7.05)	7.47	7.32 (7.10)	7.27	-
<3.73	17.8	14.6	<18	4	6	14.59	13	28	31	7	12	10	5	5	13	12	9	9	33	35	30
<0.04	<0.01	<0.01	<0.1	<0.01	<0.01	1.051	<0.01	<0.5	<0.5	0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	-
<0.05	<0.1	<0.1	<0.6	0.13	0.06	0.121	0.36	0.2	0.21	0.25	0.16	0.21	0.24	0.14	0.43	0.19	0.25	0.12	<0.03	<0.03	-
0.18	<0.019	<0.019	<0.23	<0.0047	0.1384	0.9932	0.0082	0.5821	0.5538	0.3261	0.6625	0.6613	0.2782	0.2208	0.0352	0.0075	0.1227	0.2064	0.1852	0.2213	-
4.765	9.39	8.77	<9	<3	<3	13.99	<0.3	5	5	4	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	-
<0.28	2.13	2.01	<2	<0.2	<0.2	<0.68	0.6	<0.2	<0.2	0.2	<0.2	<0.2	<0.2	<0.2	1.4	<0.2	0.3	<0.2	0.7	<0.2	-
	<30	<30	<5	<2	<2		<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	-
	<30	<30	<30	<2	<2		<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	-
5.578	5.22	5.09	5	6.5	7	9.321	5.3	5	4.9	2.7	3.3	3.7	5.5	5.2	7.4	5.8	5.5	5.1	5.3	4.7	-
2.214	16	13.7	7.7	6.7	6.5	8.64	4.2	7.5	6.5	4.7	3.5	1.8	3.2	3.9	0.9	2.6	6.7	5.1	<0.9	<0.9	-
<0.12	<0.02	<0.02	<6	2.6	2.5	0.37	4.7	4.4	4.5	<0.4	1.9	1.8	3.6	2.8	6.5	3.8	3.3	4	<0.4	<0.4	-
159	140	148	141	179	175	183	163	157	157	93	167	168	197	198	200	202	208	207	195	193	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Duplicate Retest	02/03/2016	Duplicate	06/04/2016	Duplicate	04/05/2016	Duplicate	02/06/2016	Duplicate	04/07/2016	Duplicate	03/08/2016	Duplicate	06/09/2016	Duplicate	05/10/2016	Duplicate	03/11/2016	Duplicate	06/12/2016	Duplicate	18/01/2017	Duplicate	01/02/2017
-	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
-	<1	3	1	1	2	2	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	1	2	<1	<1	<1	<1
-	7.08 (7.02)	7.09	7.27 (7.11)	7.42	7.36 (7.07)	7.39	7.06 (7.35)	7.07	7.38 (7.08)	7.17	7.29 (6.95)	7.19	7.34 (7.18)	7.37	7.53 (6.81)	7.06	7.47 (6.91)	7.29	7.16 (6.88)	7	7.05 (7.00)	6.68	7.39 (7.18)
30	13	11	19	18.6	<3	<3	5	6	3	3	3	3	<3	<3	7	6	7	6	<3	<3	25	26	29
-	0.6	<0.5	<0.5	<0.5	<0.5	<0.5	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.5	<0.5	<0.5	<0.5	<0.01
-	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
-	0.4409	0.3247	0.4914	0.4934	0.5691	0.596	0.4472	0.4561	0.9222	0.9363	0.4984	0.5022	0.4894	0.4811	0.3381	0.3371	0.5496	0.6054	0.4327	0.44	0.1683	0.1642	0.1571
-	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
-	0.5	0.3	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.3	<0.2	0.3	<0.2	<0.2	0.5	<0.2	<0.2	<0.2	0.3	<0.2	<0.2	0.3	0.2
-	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
-	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
-	6.3	4.4	3	3	4.5	3.2	4.7	4.9	3.3	4.7	4.6	4	3.3	3.5	5.6	5.2	5.4	5.3	4.2	3.2	5.9	5.7	8
-	2.4	<0.9	<0.9	<0.9	2.5	6	2.6	2.5	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	4	5.6	3.9	4.3	3.3	2	2.6
-	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
-	171	170	189	191	190	212	223	215	194	195	179	176	186	186	176	177	192	200	197	190	284	284	196
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Duplicate	20/03/2017	Duplicate	04/04/2017	Duplicate	09/05/2017	Duplicate	06/06/2017	Duplicate	06/07/2017	Duplicate	03/08/2017	Duplicate	05/09/2017	Duplicate	10/10/2017	Duplicate	14/11/2017	Duplicate	13/12/2017	Duplicate	10/01/2018	Duplicate	06/02/2018
<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	11	<10	<10	15	14	<10	<10	<10	<10	10	<10	<10	<10	<10
<1	<1	<1	3	3	2	2	<1	<1	3	3	<1	<1	2	<1	<1	<1	<1	<1	2	4	<1	<1	<1
7.53	7.51 (7.00)	7.5	7.34 (7.22)	7.36	7.63 (7.27)	7.35	7.35 (7.27)	7.32	7.05 (6.95)	7.27	7.75 (7.26)	7.7	7.6 (6.50)	7.67	7.08 (6.5)	6.85	7.54 (7.51)	7.33	7.4 (7.54)	7.56	7.45 (7.64)	7.09	7.74 (7.78)
28	29	32	12	11	3	3	10	10	2.6	2.7	NA	NA	9	10									
															3.9	2.9	2.4	2.2	25.0	23.7	49	48	22.8
<0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<1	<1	<1	<1	<0.5	<0.5	<0.01	<0.01	<0.01	<0.01	<0.5	<0.5	0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
0.1609	<0.0047	<0.0047	0.7468	0.7717	0.4589	0.4493	0.257	0.2594	1.981	1.87	0.407	0.3984	0.3153	0.1476	1.798	1.865	0.3139	0.2942	0.1678	0.2195	0.3651	0.3601	0.1836
<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.9	<0.2	<0.2	<0.2	2.2	<0.2	0.3	0.3	0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2
<6	<6	<6	NA	NA	<6	<6	<6	<6	NA	NA	NA	NA	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
7.6	4.4	3.9	3.8	4	3.2	2.7	2	2.9	1.7	1.5	1.8	2.1	2	3.2	2.7	2.7	4.3	3.5	4.8	4.5	3.9	4.2	5.1
2.2	<0.9	<0.9	1.5	2.1	<0.9	2.5	2.1	<0.9	5.8	4.3	<0.9	<0.9	1.1	<0.9	4.1	3.5	1.2	3.4	1.3	1.9	<0.9	3.2	<0.9
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	0.5	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
199	191	188	186	186	179	183	173	172	200	204	175	167	195	180	203	208	179	178	208	207	194	193	188
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Duplicate	07/03/2018	Duplicate	04/04/2018	Duplicate	03/05/2018	Duplicate	11/06/2018	Duplicate	09/07/2018	Duplicate	06/08/2018	Duplicate
<10	<10	<10	<10	12	<10	<10	<10	<10	<10	<10	<10	<10
2	<1	1	2	1	<1	<1	<1	<1	<1	<1	<1	<1
7.7	7.79 (7.74)	7.82	7.29 (7.35)	7.38	7.44 (7.25)	7.62	7.94 (7.72)	8.05	7.42 (8.45)	8.08	7.64 (8.24)	8.1
22.9	11.6	12.2	6.5	8.4	24.9	22.8	6.5	64.8	5.1	2.9	5.9	5.2
<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
0.1862	0.238	0.2461	0.5607	0.5754	0.2296	0.3156	0.1179	0.0992	0.0244	0.0181	0.0141	0.0114
<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
0.9	0.3	0.8	<0.2	<0.2	0.6	0.2	0.6	0.5	<0.2	<0.2	1.1	1.4
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
4.9	4.7	4.5	3.6	3.8	3.8	3.4	3.3	3.1	2.2	2.7	3.1	2.3
<0.9	<0.9	<0.9	<0.9	<0.9	1.9	2	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
184	189	180	180	176	190	189	177	177	178	178	170	170
-	-	-	-	-	-	-	-	-	-	-	-	-

DCS1 - Curraghinalt Burn upstream

Parameter	Detection limit (typical)	27/11/2014	16/12/2014	18/12/2015	14/01/2015	04/02/2015	11/02/2015	Duplicate	26/03/2015	23/04/2015	21/05/2015	28/05/2015	02/06/2015	28/07/2015	30/07/2015	04/08/2015	02/09/2015
Total Suspended Solids	10	<3	<3	<3	9	<3	<3	<2	18	<3	3	5	4	9	<10	<10	32
Biochemical Oxygen Demand	1	<1	<1	<1	1.87 [#]	1.39 [#]	<1	<2	1.23 [#]	<1	1.29 [#]	<1	<1	1.49 ^{#Δ}	1	2	1
pH	-	6.7	6.75	7	6.9	7.23 (6.73)	6.8 (7.33)	8.2	6.81 (7.05)	6.99	7.19	7.7	6.57	5.94 (6.49)	6.85	5.74 (8.36)	7.46
Total zinc	3	<18	<18	<18	20	<18	<18	5.394	<18	<18	<18	7.49	<18	14	8	7	8
Dissolved zinc	1.5																
Dissolved mercury	0.5	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.2	<0.1	<0.1	<0.1	<0.01	<0.1	0.51	<0.01	<0.01	<0.01
Dissolved cadmium	0.03	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.09	<0.6	<0.6	<0.6	<0.1	<0.6	6.9	<0.03	<0.03	<0.03
Dissolved iron	0.0047	2.07	0.52	0.67	0.39	0.36	0.36	0.6633	<0.23	1.34	1.34	1.47	0.52	1.2	2.569	2.046	6.269
Dissolved copper	3	<9	<9	<9	<9	<9	<9	7.207	<9	<9	<9	2.56	<9	9.6	<3	<3	4
Dissolved chromium	0.2	<2	<2	<2	<2	<2	<2	<0.68	<2	<2	<2	0.956	<2	4.7	<0.2	0.6	1.2
Chromium VI	2	<5	<5	<5	<5	<5	<5		<5	<5	<5	<30	<5	<20	<2	<2	<2
Chromium III	2	<30	<30	<30	<30	<30	<30		<30	<30	<30	<30	<30	<20	<2	<2	<2
Dissolved nickel	0.2	<3	<3	<3	<3	<3	<3	0.702	<3	<3	<3	0.913	<3	3.1	0.7	1	1.6
Dissolved arsenic	0.9	2.4	<1	<1	<1	1.3	<1	1.197	2	3.2	2.2	3.69	1.2	2.8	2.5	2.6	4.6
Dissolved lead	0.4	<6	<6	<6	<6	<6	<6	0.284	<6	<6	<6	0.315	<6	2.1	<0.4	<0.4	2.7
Total hardness as CaCO3	1	21.7	16.2	21.1	30.1	24.2	19.7	19	13.4	33.1	17.6	29.4	9.98	<15	229	12	23
Visible oil or grease	N/A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes:

pH values presented in pH units. Values in brackets are field pH measurements. Total Suspended Solids, Biochemical Oxygen Demand, Total hardness & Dissolved iron concentrations are presented in mg/L, all other parameters are in µg/L.

[#] BOD over diluted, therefore result indicative only ^Δ Container with headspace

DCS3 - Curraghinalt Burn downstream

Parameter	Detection limit (typical)	27/11/2014	16/12/2014	18/12/2014	14/01/2015	04/02/2015	11/02/2015	Duplicate	26/03/2015	23/04/2015	21/05/2015	28/05/2015	02/06/2015	Duplicate	28/07/2015	30/07/2015	04/08/2015	02/09/2015
Total Suspended Solids	10	3	8	4	5	3	5	28	72	<3	18	9		3	16	<10	<10	<10
Biochemical Oxygen Demand	1	1.08 [#]	<1	<1	1.65 [#]	1.91 [#]	<1	1.31 [#]	<1	1.25 [#]	1.22 [#]	<1	<1	<2	1.42 ^{#Δ}	1	2	1
pH	-	7.19	7.46	6.95	7.44	7.16 (6.93)	7.45 (7.2)	6.91 (7.31)	7.82	7.88	7.76	6.81	7.4	7.4	6.02 (6.28)	7.12	5.95 (6.40)	7.12
Total zinc	3	<18	<18	<18	20	<18	<18	<18	<18	<18	<18	11.2	<18	36.51	13	9	7	9
Dissolved zinc	1.5																	
Dissolved mercury	0.5	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.01	<0.1	<0.2	<0.5	<0.01	<0.01	<0.01
Dissolved cadmium	0.03	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.1	<0.6	<0.09	0.45	<0.03	<0.03	<0.03
Dissolved iron	0.0047	1.78	0.54	0.65	0.38	0.25	0.25	0.24	0.8	1.13	1.03	0.52	0.52	1.485	1.2	2.634	1.843	3.455
Dissolved copper	3	<9	<9	<9	<9	<9	<9	<9	<9	<9	<9	5.58	<9	19.83	4.2	3	<3	3
Dissolved chromium	0.2	<2	<2	<2	6	<2	<2	<2	<2	<2	<2	1.8	<2	1.017	4.6	<0.2	<0.2	<0.2
Chromium VI	2	<5	<5	<5	8	<5	<5	<5	<5	<5	<5	<30	<5		<20	<2	<2	<2
Chromium III	2	<30	<30	<30	<30	<30	<30	<30	<30	<30	<30	<30	<30		<20	<2	<2	<2
Dissolved nickel	0.2	<3	<3	<3	<3	<3	4	<3	<3	<3	2.12	<3	<3	6.816	4.6	0.7	0.4	2.4
Dissolved arsenic	0.9	2.1	<1	<1	<1	2	1.3	2.7	5.3	8.3	7.7	1.5	1.5	7.069	1.3	<0.9	2	3.4
Dissolved lead	0.4	<6	<6	<6	<6	<6	<6	<6	<6	<6	0.187	<6	<6	0.381	<1	1	0.7	1.2
Total hardness as CaCO3	1	35.5	27.5	21	34.5	41.4	49.4	13.7	71.4	36.6	65.1	10.8		25	<15	21	21	68
Visible oil or grease	N/A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes:

pH values presented in pH units. Values in brackets are field pH measurements. Total Suspended Solids, Biochemical Oxygen Demand, Total hardness & Dissolved iron concentrations are presented in mg/L, all other parameters are in µg/L.

[#] BOD over diluted, therefore result indicative only ^Δ Container with headspace

01/10/2015	22/10/2015	05/11/2015	09/12/2015	06/01/2016	03/02/2016	02/03/2016	06/04/2016	04/05/2016	02/06/2016	04/07/2016	03/08/2016	06/09/2016	05/10/2016	03/11/2016	06/12/2016	18/01/2017	01/02/2017	20/03/2017	04/04/2017	09/05/2017	06/06/2017	
<10	<10	17	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	19	<10	<10	
2	<1	2	2	1	<1	2	2	2	<1	<1	2	2	2	1	1	<1	9	<1	2	1	<1	
6.75	7.34	7.74 (7.54)	6.79 (6.49)	7.59 (6.64)	6.09 (4.82)	7.18 (6.87)	6.70 (6.71)	6.94 (7.5)	7.21 (7.78)	7.04 (7.34)	6.51 (6.99)	6.5 (7.52)	7.76 (7.33)	7.81 (7.42)	6.55 (7.36)	6.85 (7.33)	6.57 (6.66)	6.14 (6.72)	7.15 (6.8)	8.8 (7.62)	6.55 (6.71)	
7	6	28	4	4	20	8	4	<3	<3	5	10	7	7	5	3	4	5	5	7	<3	5	
<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.5	<0.5	<0.01	<0.5	<0.5	<0.5	<0.5	
<0.03	<0.03	0.09	0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	
6.646	5.39	4.41	1.131	1.276	0.3198	0.7347	0.7676	1.861	3.229	1.876	3.405	3.162	8.689	7.586	3.364	0.6952	0.7231	0.7234	1.113	1.456	1.272	
<3	<3	4	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	4	6	<3	<3	<3	<3	<3	<3	<3	
0.4	<0.2	0.3	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.5	<0.2	0.5	0.2	0.7	<0.2	<0.2	<0.2	<0.2	
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	NA	<6	<6	
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	
1.3	0.3	0.7	<0.2	1.2	0.4	0.3	<0.2	<0.2	0.3	0.4	0.7	0.2	2.2	1.5	0.9	0.5	0.6	0.3	0.6	0.4	<0.2	
5.9	2.8	<0.9	1.2	1.8	<0.9	<0.9	<0.9	2.5	2.9	4	<0.9	1.1	7.2	10.5	5.4	0.9	<0.9	<0.9	<0.9	3.6	2.1	
<0.4	<0.4	1.2	1.1	1.2	<0.4	0.6	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	0.9	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	
30	24	37	7	12	18	16	9	21	33	16	16	14	27	31	27	18	13	10	127	38	10	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

01/10/2015	22/10/2015	05/11/2015	09/12/2015	06/01/2016	03/02/2016	02/03/2016	06/04/2016	04/05/2016	02/06/2016	04/07/2016	03/08/2016	06/09/2016	05/10/2016	03/11/2016	06/12/2016	18/01/2017	01/02/2017	20/03/2017	04/04/2017	09/05/2017	06/06/2017	
<10	<10	10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	25	<10	<10	
1	<1	2	3	<1	<1	2	2	1	1	1	2	1	2	<1	1	<1	<1	<1	2	1	<1	
6.45	7.46	7.73 (7.5)	7.45 (6.5)	7.47 (6.68)	7.35 (5.77)	6.86 (7.14)	7.12 (6.77)	7.4 (7.25)	7.06 (7.47)	6.74 (7.20)	6.95 (7.12)	7.02 (7.13)	7.52 (7.12)	7.62 (6.97)	7.45 (6.91)	7.32 (6.74)	7.48 (6.71)	6.93 (7.06)	7.41 (7.16)	7.76 (7.39)	7.14 (7.09)	
7	8	17	4	6	18	8	4	<3	5	5	6	6	7	7	6	8	10	5	9	3	6	
0.6	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.5	<0.5	<0.01	<0.5	<0.5	<0.5	<0.5	
<0.03	<0.03	0.07	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	
6.574	3.424	2.834	1.016	0.993	0.305	0.508	0.7319	1.043	1.172	1.901	3.003	3.11	3.905	3.272	1.987	0.5208	0.7368	0.7424	0.904	0.5302	1.058	
<3	<3	7	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	
<0.2	<0.2	0.9	<0.2	<0.2	<0.2	0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.4	0.3	1.3	<0.2	<0.2	<0.2	<0.2	
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	NA	<6	<6	
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	
1.4	2.3	2.5	<0.2	1.1	0.7	1	<0.2	1.8	3	<0.2	1	0.4	3.7	3.9	2.2	1.6	1.2	<0.2	0.9	1.4	0.4	
6.5	3.9	3.6	2.8	5.3	1.3	<0.9	<0.9	2.1	1.6	4.2	1.4	3.8	1.3	7.4	4.2	<0.9	2.4	<0.9	2.9	<0.9	1.5	
0.9	<0.4	2.8	<0.4	0.8	2	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	
31	84	100	22	57	33	41	12	102	157	26	35	35	110	124	93	71	23	12	49	128	41	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

06/07/2017	03/08/2017	05/09/2017	10/10/2017	14/11/2017	13/12/2017	10/01/2018	06/02/2018	07/03/2018	04/04/2018	03/05/2018	11/06/2018	09/07/2018	06/08/2018
<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	1	<1	2
6.49 (7.49)	6.28 (5.28)	6.42 (6.81)	6.05 (6.63)	7.33 (7.32)	6.9 (7.85)	6.87 (7.52)	7.67 (7.9)	7.87 (7.84)	6.92 (6.03)	7.61 (6.75)	7.85 (7.41)	6.26 (7.86)	6.22 (7.61)
3.8	NA	8											
			7.3	6.1	2.9	6.6	8.5	2.4	4.7	7.4	6.4	5.1	6.8
<1	<1	<0.5	<0.01	<0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
2.382	2.006	1.828	1.448	1.393	0.5909	0.7136	0.5669	0.4264	0.6562	1.166	2.54	3.09	3.451
<3	<3	6	3	<3	<3	<3	<3	<3	<3	3	7	6	5
<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.5	<0.2	<0.2	1	<0.2	0.3
NA	NA	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<0.2	<0.2	0.9	1.1	<0.2	<0.2	0.5	0.2	0.5	<0.2	1.7	1.3	0.7	0.3
1.7	<0.9	1.7	<0.9	2	1	<0.9	<0.9	<0.9	2.1	<0.9	1.7	3.1	1.8
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
17	8	14	11	13	9	10	22	14	9	17	27	33	23
-	-	-	-	-	-	-	-	-	-	-	-	-	-

06/07/2017	03/08/2017	05/09/2017	10/10/2017	14/11/2017	13/12/2017	10/01/2018	06/02/2018	07/03/2018	04/04/2018	03/05/2018	11/06/2018	09/07/2018	06/08/2018
<10	<10	15	<10	<10	14	<10	<10	<10	<10	<10	<10	<10	<10
<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	1	<1	<1	<1
7.37 (7.49)	6.41 (6.9)	7.36 (6.63)	7.19 (6.29)	6.37 (7.01)	7.3	7.91 (7.33)	7.66 (7.79)	7.91 (8.16)	7.3 (6.95)	7.68 (7.3)	7.99 (7.91)	7.98 (8.45)	7.71 (7.82)
4.6	NA	10											
			7.4	6.3	3.1	15.8	16.7	5.3	4.2	9.6	9.3	2.9	7.6
<1	<1	<0.5	<0.01	<0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
2.146	1.896	1.281	1.422	1.352	0.5759	0.6817	0.3665	0.3316	0.6125	1.03	1.102	0.5419	1.95
<3	<3	4	3	<3	<3	<3	<3	<3	<3	4	3	<3	4
<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.3	<0.2	0.5	1.7	<0.2	<0.2
NA	NA	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<0.2	<0.2	1.9	0.9	0.4	<0.2	1.1	2.4	1.5	0.7	0.9	1.6	2.2	1.7
6.6	1.7	1.7	2.9	<0.9	<0.9	1.6	<0.9	1.7	<0.9	2.3	<0.9	<0.9	<0.9
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
39	16	56	19	16	15	40	85	55	20	31	117	146	85
-	-	-	-	-	-	-	-	-	-	-	-	-	-

DCS4 - Owenkillew River upstream

Parameter	Detection limit (typical)	27/11/2014	16/12/2014	18/12/2014	14/01/2015	04/02/2015	11/02/2015	26/03/2015	Duplicate	23/04/2015	Duplicate	21/05/2015	02/06/2015	07/07/2015	28/07/2015	30/07/2015	04/08/2015
Total Suspended Solids	10	<3	<3	6	<3	<3	<3	42	43	<3	<2	6	9	13	9	<10	12
Biochemical Oxygen Demand	1	<1	<1	<1	1.47 [#]	1.29 [#]	<1	2.57 [#]	8	<1	<2	1.95 [#]	1.28 [#]	2.47 [#]	1.95 ^{#A}	1	1
pH	-	6.84	7.07	6.68	6.77	6.7 (5.92)	7.06 (8.15)	6.9 (8.54)	7.7	7.93	7.2	7.23	6.79	(7.36)	6.1 (6.50)	6.68	7.28 (9.90)
Total zinc	3	<18	<18	<18	<18	<18	<18	<18	9.716	<18	<0.63	<18	<18	6.7	9.6	6	6
Dissolved zinc	1.5																
Dissolved mercury	0.5	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.2	<0.1	<0.03	<0.1	<0.1	<0.5	<0.5	0.04	<0.01
Dissolved cadmium	0.03	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.09	<0.6	<0.01	<0.6	<0.6	<0.08	0.6	<0.03	<0.03
Dissolved iron	0.0047	1.05	0.5	0.45	0.43	0.4	0.36	0.25	0.2771	0.56	0.806	0.53	0.36	0.56	0.78	1.146	2.459
Dissolved copper	3	<9	<9	<9	<9	<9	<9	<9	20.09	<9	0.445	<9	<9	1.1	3.2	<3	<3
Dissolved chromium	0.2	<2	<2	<2	<2	<2	<2	<2	<0.68	<2	<0.58	<2	<2	<1	5.8	<0.2	<0.2
Chromium VI	2	<5	<5	<5	<5	<5	<5	<5		<5		<5	<5	<20	<20	<2	<2
Chromium III	2	<30	<30	<30	<30	<30	<30	<30		<30		<30	<30	<20	<20	<2	<2
Dissolved nickel	0.2	<3	57	<3	<3	<3	<3	4	6.45	<3	0.569	<3	<3	<1	6.3	0.4	0.7
Dissolved arsenic	0.9	<1	<1	<1	<1	<1	<1	4.8	5.032	1.5	1.399	1.4	1.1	<1	1.2	2.4	2.4
Dissolved lead	0.4	<6	<6	<6	<6	<6	<6	<6	0.543	<6	<0.02	<6	<6	<1	<1	2.2	0.5
Total hardness as CaCO3	1	28.8	24.3	19.1	25.1	31	27.9	17.6	21	37.5	38	23.7	16.2	30	<15	25	23
Visible oil or grease	N/A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes:

pH values presented in pH units. Values in brackets are field pH measurements. Total Suspended Solids, Biochemical Oxygen Demand, Total hardness & Dissolved iron concentrations are presented in mg/L, all other parameters are in µg/L.

[#] BOD over diluted, therefore result indicative only

^A Container with headspace

DCS5 - Owenkillew River downstream

Parameter	Detection limit (typical)	27/11/2014	16/12/2014	18/12/2014	14/01/2015	04/02/2015	11/02/2015	23/03/2015	26/03/2015	23/04/2015	21/05/2015	Duplicate	02/06/2015	07/07/2015	28/07/2015	30/07/2015	04/08/2015
Total Suspended Solids	10	<3	<3	8	<3	<3	<3	5	35	<3	<3	2	<3	14	12	<10	<10
Biochemical Oxygen Demand	1	<1	<1	<1	1.61 [#]	1.37 [#]	<1	<2	2.59 [#]	<1	1.17 [#]	<2	1.1 [#]	2.01 [#]	2.04 ^{#A}	1	2
pH	-	7.04	7.15	6.61	6.76	6.66 (5.54)	7.03 (7.45)	7.5	6.9 (6.77)	7.71	6.94	7.5	6.88	7.23 (7.41)	6.2 (6.96)	6.88	6.51 (7.41)
Total zinc	3	<18	<18	<18	<18	<18	<18	11.69	20	<18	<18	4.396	<18	8.8	11	7	5
Dissolved zinc	1.5																
Dissolved mercury	0.5	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.2	<0.1	<0.1	<0.1	<0.2	<0.1	<0.5	<0.5	0.05	0.03
Dissolved cadmium	0.03	<0.6	<0.6	<0.6	<0.6	<0.6	<0.6	<0.09	<0.6	<0.6	<0.6	<0.09	<0.6	<0.08	0.5	<0.03	<0.03
Dissolved iron	0.0047	0.98	0.5	0.42	0.43	0.37	0.39	0.6379	0.25	0.58	0.56	0.5218	0.38	0.63	0.83	1.241	2.749
Dissolved copper	3	<9	<9	<9	<9	<9	<9	0.322	<9	<9	<9	2.819	<9	<1	3.2	<3	<3
Dissolved chromium	0.2	<2	<2	<2	<2	<2	<2	<0.68	<2	<2	<2	<0.68	<2	<1	6.5	<0.2	0.3
Chromium VI	2	<5	<5	<5	8	<5	<5		<5	<5	<5		<5	<20	<20	<2	<2
Chromium III	2	<30	<30	<30	<30	<30	<30		<30	<30	<30		<30	<20	<20	<2	<2
Dissolved nickel	0.2	<3	<3	<3	<3	<3	<3	0.649	<3	<3	<3	0.997	<3	<1	7.1	0.5	0.8
Dissolved arsenic	0.9	<1	<1	<1	<1	1.2	<1	1.158	5	1.5	1.3	1.183	1.1	<1	1.2	2.4	5.4
Dissolved lead	0.4	<6	<6	<6	<6	<6	<6	<0.173	<6	<6	<6	<0.173	<6	<1	<1	2.4	<0.4
Total hardness as CaCO3	1	29.3	23.8	18.2	25.3	31	27.1	35	17.2	41.6	23	25	16.3	31	<15	27	21
Visible oil or grease	N/A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Notes:

pH values presented in pH units. Values in brackets are field pH measurements. Total Suspended Solids, Biochemical Oxygen Demand, Total hardness & Dissolved iron concentrations are presented in mg/L, all other parameters are in µg/L.

[#] BOD over diluted, therefore result indicative only

^A Container with headspace

Duplicate	02/09/2015	01/10/2015	22/10/2015	05/11/2015	09/12/2015	06/01/2015	03/02/2015	02/03/2016	06/04/2016	04/05/2016	02/06/2016	04/07/2016	03/08/2016	06/09/2016	05/10/2016	03/11/2016	06/12/2016	18/01/2017	01/02/2017	20/03/2017	04/04/2017
3	<10	<10	<10	<10	11	<10	<10	<10	10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	10	<10
<2	2	1	2	2	1	1	1	2	2	1	1	<1	1	1	<1	1	2	1	1	<1	2
7.4	7.79	6.45	7.46	7.65 (7.14)	6.83 (6.65)	7.1 (6.16)	7.08 (6.24)	7.19 (6.29)	7.2 (7.19)	7.08 (7.58)	7.23 (7.89)	6.74 (7.27)	7.08 (7.25)	7.07 (7.25)	7.61 (7.07)	7.73 (7.21)	7.59 (7.20)	7.39 (6.52)	7.38 (6.71)	6.69 (7.06)	7.34 (7.19)
10.31	4	3	<3	3	5	4	10	6	4	<3	<3	4	25	5	8	<3	<3	4	3.9	4	3
<0.2	<0.01	0.6	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.01	0.39	<0.01	<0.01	<0.01	<0.01	<0.5	<0.5	<0.01	<0.5	<0.5
<0.09	0.05	0.14	<0.03	0.08	0.2	0.15	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
1.482	1.806	1.503	0.9033	1.269	0.7594	0.7784	0.242	0.6605	0.6255	0.6549	0.8637	0.97	1.596	1.553	1.797	1.34	1.051	0.6403	0.7023	0.6057	0.8926
11.24	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	3	<3	<3	<3	<3	<3	<3	<3	<3
<0.68	1	0.6	<0.2	<0.2	<0.2	0.3	<0.2	0.3	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.4	0.2	<0.2	<0.2	<0.2
	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6
	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6
1.513	1.3	0.6	0.4	0.7	<0.2	1.6	0.8	<0.2	<0.2	<0.2	<0.2	<0.2	0.6	0.6	0.4	1.3	1	<0.2	0.7	<0.2	0.5
3.454	2.2	2.8	1.6	<0.9	2.7	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	2.5	<0.9	4.7	1.6	2.9	3.4	<0.9	<0.9	<0.9	<0.9
0.573	4	<0.4	<0.4	1.9	<0.4	<0.4	1.2	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	1.5	<0.4	<0.4	<0.4	<0.4
22	32	41	29	38	16	15	21	17	20	26	43	25	45	26	37	43	39	28	19	16	27
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

02/09/2015	01/10/2015	22/10/2015	05/11/2015	09/12/2015	06/01/2015	03/02/2015	02/03/2016	06/04/2016	04/05/2016	02/06/2016	04/07/2016	03/08/2016	06/09/2016	05/10/2016	03/11/2016	06/12/2016	18/01/2017	01/02/2017	20/03/2017	04/04/2017	09/05/2017
<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10
1	1	<1	1	2	1	1	2	2	2	1	1	1	1	<1	<1	2	2	<1	<1	1	1
6.51	7.91	7.12	7.49 (7.11)	7.55 (6.66)	7.31 (6.49)	6.91 (6.22)	7.07 (6.32)	7.2 (7.23)	7.09 (7.7)	6.64 (7.87)	6.94 (7.11)	7.08 (7.29)	7.1 (7.20)	7.63 (6.90)	7.97 (7.17)	6.96 (7.18)	7.3 (6.59)	6.19 (6.74)	6.64 (7.04)	6.72 (7.32)	6.54 (7.60)
5	<3	4	4	5	5	9	5	4	<3	<3	5	4	5	4	<3	<3	3	4.4	5	3.7	<1.5
0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.01	<0.01	<0.01	0.06	<0.01	<0.01	<0.5	<0.5	<0.01	<0.5	<0.5	<0.5
0.19	<0.03	0.2	0.14	0.11	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
1.835	1.938	1.312	1.37	0.7792	0.7899	0.2365	0.6817	0.6246	0.646	0.8452	1.166	1.868	1.675	1.824	1.374	1.063	0.6517	0.6844	0.6228	0.8342	0.505
<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
1	<0.2	<0.2	0.3	<0.2	0.5	<0.2	0.8	<0.2	<0.2	<0.2	0.6	<0.2	<0.2	0.3	0.5	<0.2	0.7	<0.2	0.3	<0.2	<0.2
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
1.4	0.5	0.6	0.9	0.5	1.1	0.9	<0.2	<0.2	<0.2	<0.2	0.9	1.2	0.9	1.5	1	0.8	0.4	<0.2	<0.2	<0.2	0.5
<0.9	1.8	1.7	<0.9	<0.9	<0.9	<0.9	<0.9	1	<0.9	1.9	<0.9	<0.9	<0.9	2.3	3.8	3.7	2.3	<0.9	<0.9	<0.9	1.6
2.2	<0.4	2.1	<0.4	<0.4	<0.4	0.6	0.8	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
36	43	30	41	16	18	22	18	21	29	47	26	38	29	43	45	45	30	21	18	28	48
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

09/05/2017	06/06/2017	06/07/2017	03/08/2017	05/09/2017	10/10/2017	14/11/2017	13/12/2017	10/01/2018	06/02/2018	07/03/2018	04/04/2018	03/05/2018	11/06/2018	09/07/2018	06/08/2018
<10	<10	10	<10	<10	<10	<10	25	<10	<10	<10	<10	<10	<10	<10	<10
1	1	2	<1	<1	<1	<1	<1	<1	<1	1	<1	<1	3	<1	<1
7.3 (7.59)	7.22 (6.84)	7.14 (6.94)	6.89 (6.33)	6.35 (6.5)	7.49 (6.51)	7.55 (7.01)	7.37 (6.75)	6.14 (6.77)	6.36 (7.58)	7.93 (7.6)	7.69 (7.12)	6.1 (6.97)	6.1 (7.57)	6.14 (7.73)	7.74 (7.6)
<1.5	4	3.6	7.3	3.6	5	2.7	2.2	7.3	<1.5	2.7	4.2	4.3	4.6	1.5	<1.5
<0.5	<0.5	<1	<1	<0.5	<0.01	<0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
0.533	0.8258	1.041	1.359	1.38	1.316	1.008	0.504	0.601	0.5692	0.4357	0.5564	0.7309	1.175	0.617	0.9438
<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
0.3	<0.2	0.3	<0.2	<0.2	0.3	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.8	0.7
<6	<6	NA	NA	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
0.6	<0.2	0.9	<0.2	1.1	1.4	0.7	<0.2	<0.2	<0.2	<0.2	<0.2	0.6	0.6	0.2	1.7
<0.9	1.2	6.6	1.6	<0.9	1.5	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	2.3	<0.9	3.9	2
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
41	18	25	17	22	19	20	15	13	27	19	17	23	33	45	36
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

06/06/2017	06/07/2017	03/08/2017	05/09/2017	10/10/2017	14/11/2017	13/12/2017	10/01/2018	06/02/2018	07/03/2018	04/04/2018	03/05/2018	11/06/2018	09/07/2018	06/08/2018
<10	14	<10	<10	<10	<10	23	<10	<10	<10	<10	<10	<10	<10	<10
1	2	<1	<1	<1	<1	<1	<1	<1	2	<1	<1	1	<1	<1
6.33 (6.95)	6.49 (6.9)	6.71 (6.37)	6.52 (6.59)	6.33 (6.55)	6.58 (7.04)	4.24(6.9)	6.15 (6.83)	6.38 (7.58)	6.27 (7.48)	6.35 (6.87)	6.16 (6.76)	6.18 (7.57)	6.2 (7.62)	6.28 (7.48)
6	5.2	8.9	3.6	5.3	2.9	2.7	5.7	4	2.9	8.5	4.2	3.2	2.5	3.2
<0.5	<1	<1	<0.5	<0.01	<0.01	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03
0.8812	1.069	1.381	1.308	1.321	1.02	0.4768	0.6217	0.552	0.431	0.5781	0.7646	1.176	0.6968	0.9051
<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3	<3
0.4	0.8	<0.2	<0.2	0.5	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	0.3
<6	NA	NA	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
0.8	<0.2	<0.2	1	1.6	0.2	<0.2	<0.2	<0.2	0.5	0.8	1.3	1.1	<0.2	1.6
3	<0.9	2.1	2.2	2.8	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9	1.1	<0.9	1.4	1.8
<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4
20	26	17	23	19	21	15	14	32	23	18	23	35	48	38
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Appendix B
Laboratory Results



[Redacted]
Registered Address [Redacted]

[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]

Dalradian Gold Ltd

[Redacted]
[Redacted]
[Redacted]

Tel: [Redacted]
Fax: [Redacted]



Attention : [Redacted]
Date : 11th July, 2018
Your reference : DCS/SW Monthly
Our reference : Test Report 18/9051 Batch 1 18/9056 Batch 1
Location : Curraghinalt
Date samples received :
Status : Final report
Issue : 1

Compiled By:

[Redacted]

[Redacted] **BSc**
Project Manager

Client Name: Dalradian Gold Ltd
Reference: DCS/SW Monthly
Location: Curraghinalt
Contact:

Report : Liquid

Liquids/products: V=40ml vial, G=glass bottle, P=plastic bottle
 H=H₂SO₄, Z=ZnAc, N=NaOH, HN=HNO₃

Job No.	18/9056	18/9056	18/9056	18/9051	18/9051	18/9051	18/9056						
Sample No.	1-5	6-10	11-15	1-8	9-16	17-24	16-20						
Sample ID	DCS1	DCS2	DCS3	DCS4	DCS5	DCS6	DCS7						
Depth													
COC No / misc													
Containers	HN NB P BOD G	HN NB P BOD G	HN NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	HN NB P BOD G						
Sample Date	11/06/2018	11/06/2018	11/06/2018	11/06/2018	11/06/2018	11/06/2018	11/06/2018						
Sample Type	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water						
Batch Number	1	1	1	1	1	1	1						
Date of Receipt	12/06/2018	12/06/2018	12/06/2018	12/06/2018	12/06/2018	12/06/2018	12/06/2018						
											LOD/LOR	Units	Method No.
Dissolved Arsenic #	1.7	<0.9	<0.9	<0.9	<0.9	<0.9	<0.9				<0.9	ug/l	TM30/PM14
Dissolved Cadmium #	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03				<0.03	ug/l	TM30/PM14
Total Dissolved Chromium #	1.0	0.6	1.7	<0.2	<0.2	<0.2	0.5				<0.2	ug/l	TM30/PM14
Dissolved Copper #	7	<3	3	<3	<3	<3	<3				<3	ug/l	TM30/PM14
Total Dissolved Iron #	2.5400	0.1179	1.1020	1.1750	1.1760	<0.0047	0.0992				<0.0047	mg/l	TM30/PM14
Dissolved Lead #	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4				<0.4	ug/l	TM30/PM14
Dissolved Mercury #	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5				<0.5	ug/l	TM30/PM14
Dissolved Nickel #	1.3	3.3	1.6	0.6	1.1	<0.2	3.1				<0.2	ug/l	TM30/PM14
Dissolved Zinc #	6.4	6.5	9.3	4.6	3.2	<1.5	64.8				<1.5	ug/l	TM30/PM14
Total Hardness Dissolved (as CaCO ₃)	27	177	117	33	35	<1	177				<1	mg/l	TM30/PM14
Hexavalent Chromium #	<6	<6	<6	<6	<6	<6	<6				<6	ug/l	TM38/PM0
Total Dissolved Chromium III	<6	<6	<6	<6	<6	<6	<6				<6	ug/l	TM0/PM0
BOD (Settled) #	1	<1	<1	3	1	<1	<1				<1	mg/l	TM58/PM0
pH #	7.85	7.94	7.99	6.10	6.18	5.39	8.05				<0.01	pH units	TM73/PM0
Total Suspended Solids #	<10	<10	<10	<10	<10	<10	<10				<10	mg/l	TM37/PM0

Please see attached notes for all abbreviations and acronyms

Notification of Deviating Samples

Matrix : Liquid

Client Name: Dalradian Gold Ltd
Reference: DCS/SW Monthly
Location: Curraghinalt
Contact: [Redacted]

J E Job No.	Batch	Sample ID	Depth	J E Sample No.	Analysis	Reason

Please note that only samples that are deviating are mentioned in this report. If no samples are listed it is because none were deviating. Only analyses which are accredited are recorded as deviating if set criteria are not met.

NOTES TO ACCOMPANY ALL SCHEDULES AND REPORTS

JE Job No.: 18/9051 18/9056

SOILS

Please note we are only MCERTS accredited (UK soils only) for sand, loam and clay and any other matrix is outside our scope of accreditation.

Where an MCERTS report has been requested, you will be notified within 48 hours of any samples that have been identified as being outside our MCERTS scope. As validation has been performed on clay, sand and loam, only samples that are predominantly these matrices, or combinations of them will be within our MCERTS scope. If samples are not one of a combination of the above matrices they will not be marked as MCERTS accredited.

It is assumed that you have taken representative samples on site and require analysis on a representative subsample. Stones will generally be included unless we are requested to remove them.

All samples will be discarded one month after the date of reporting, unless we are instructed to the contrary.

If you have not already done so, please send us a purchase order if this is required by your company.

Where appropriate please make sure that our detection limits are suitable for your needs, if they are not, please notify us immediately.

All analysis is reported on a dry weight basis unless stated otherwise. Results are not surrogate corrected. Samples are dried at 35°C ±5°C unless otherwise stated. Moisture content for CEN Leachate tests are dried at 105°C ±5°C.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

Where a CEN 10:1 ZERO Headspace VOC test has been carried out, a 10:1 ratio of water to wet (as received) soil has been used.

% Asbestos in Asbestos Containing Materials (ACMs) is determined by reference to HSG 264 The Survey Guide - Appendix 2 : ACMs in buildings listed in order of ease of fibre release.

Negative Neutralization Potential (NP) values are obtained when the volume of NaOH (0.1N) titrated (pH 8.3) is greater than the volume of HCl (1N) to reduce the pH of the sample to 2.0 - 2.5. Any negative NP values are corrected to 0.

The calculation of Pyrite content assumes that all oxidisable sulphides present in the sample are pyrite. This may not be the case. The calculation may be an overestimate when other sulphides such as Barite (Barium Sulphate) are present.

WATERS

Please note we are not a UK Drinking Water Inspectorate (DWI) Approved Laboratory .

ISO17025 accreditation applies to surface water and groundwater and usually one other matrix which is analysis specific, any other liquids are outside our scope of accreditation.

As surface waters require different sample preparation to groundwaters the laboratory must be informed of the water type when submitting samples.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

DEVIATING SAMPLES

Samples must be received in a condition appropriate to the requested analyses. All samples should be submitted to the laboratory in suitable containers with sufficient ice packs to sustain an appropriate temperature for the requested analysis. If this is not the case you will be informed and any test results that may be compromised highlighted on your deviating samples report.

SURROGATES

Surrogate compounds are added during the preparation process to monitor recovery of analytes. However low recovery in soils is often due to peat, clay or other organic rich matrices. For waters this can be due to oxidants, surfactants, organic rich sediments or remediation fluids. Acceptable limits for most organic methods are 70 - 130% and for VOCs are 50 - 150%. When surrogate recoveries are outside the performance criteria but the associated AQC passes this is assumed to be due to matrix effect. Results are not surrogate corrected.

DILUTIONS

A dilution suffix indicates a dilution has been performed and the reported result takes this into account. No further calculation is required.

BLANKS

Where analytes have been found in the blank, the sample will be treated in accordance with our laboratory procedure for dealing with contaminated blanks.

NOTE

Data is only reported if the laboratory is confident that the data is a true reflection of the samples analysed. Data is only reported as accredited when all the requirements of our Quality System have been met. In certain circumstances where all the requirements of the Quality System have not been met, for instance if the associated AQC has failed, the reason is fully investigated and documented. The sample data is then evaluated alongside the other quality control checks performed during analysis to determine its suitability. Following this evaluation, provided the sample results have not been effected, the data is reported but accreditation is removed. It is a UKAS requirement for data not reported as accredited to be considered indicative only, but this does not mean the data is not valid.

Where possible, and if requested, samples will be re-extracted and a revised report issued with accredited results. Please do not hesitate to contact the laboratory if further details are required of the circumstances which have led to the removal of accreditation.

REPORTS FROM THE SOUTH AFRICA LABORATORY

Any method number not prefixed with SA has been undertaken in our UK laboratory unless reported as subcontracted.

Please include all sections of this report if it is reproduced

All solid results are expressed on a dry weight basis unless stated otherwise.

ABBREVIATIONS and ACRONYMS USED

#	ISO17025 (UKAS Ref No. 4225) accredited - UK.
SA	ISO17025 (SANAS Ref No.T0729) accredited - South Africa.
B	Indicates analyte found in associated method blank.
DR	Dilution required.
M	MCERTS accredited.
NA	Not applicable
NAD	No Asbestos Detected.
ND	None Detected (usually refers to VOC and/SVOC TICs).
NDP	No Determination Possible
SS	Calibrated against a single substance
SV	Surrogate recovery outside performance criteria. This may be due to a matrix effect.
W	Results expressed on as received basis.
+	AQC failure, accreditation has been removed from this result, if appropriate, see 'Note' on previous page.
++	Result outside calibration range, results should be considered as indicative only and are not accredited.
*	Analysis subcontracted to an [REDACTED] approved laboratory.
AD	Samples are dried at 35°C ±5°C
CO	Suspected carry over
LOD/LOR	Limit of Detection (Limit of Reporting) in line with ISO 17025 and MCERTS
ME	Matrix Effect
NFD	No Fibres Detected
BS	AQC Sample
LB	Blank Sample
N	Client Sample
TB	Trip Blank Sample
OC	Outside Calibration Range
AA	x2 Dilution
AB	x10 Dilution
AC	x250 Dilution

Job No: 18/9051 18/9056

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/S ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM0	Not available	PM0	No preparation is required.				
TM5	Modified USEPA 8015B method for the determination of solvent Extractable Petroleum Hydrocarbons (EPH) with carbon banding within the range C8-C40 GC-FID.	PM30	Water samples are extracted with solvent using a magnetic stirrer to create a vortex.	Yes			
TM20	Modified BS 1377-3: 1990/USEPA 160.3 Gravimetric determination of Total Dissolved Solids/Total Solids	PM0	No preparation is required.	Yes			
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.				
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			
TM37	Modified methods USEPA 160.2, EN872:2005 and SMWW 2540D. Gravimetric determination of Total Suspended Solids. Sample is filtered through a 1.5µm pore size glass fibre filter and the resulting residue is dried and weighed.	PM0	No preparation is required.	Yes			
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.				
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.	Yes			
TM42	Modified US EPA method 8270. Pesticides and herbicides by GC-MS	PM30	Water samples are extracted with solvent using a magnetic stirrer to create a vortex.				
TM57	Modified US EPA Method 410.4. Chemical Oxygen Demand is determined by hot digestion with Potassium Dichromate and measured spectrophotometrically.	PM0	No preparation is required.	Yes			

Job No: 18/9051 18/9056

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/S ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM58	APHA Standard Methods for the extraction of water and waste water (SMEWW) 5210B. Measurement of Biochemical Oxygen Demand. When cBOD (Carbonaceous BOD) is requested a nitrification inhibitor is added which prevents the oxidation of reduced forms of nitrogen, such as ammonia, nitrite and organic nitrogen which exert a nitrogenous demand.	PM0	No preparation is required.	Yes			
TM60	Modified USEPA 9060. Determination of TOC by calculation from Total Carbon and Inorganic Carbon using a TOC analyser, the carbon in the sample is converted to CO2 and then passed through a non-dispersive infrared gas analyser (NDIR).	PM0	No preparation is required.	Yes			
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.				
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.	Yes			
TM73	Modified US EPA methods 150.1 and 9045D and BS1377:1990. Determination of pH by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM75	Modified US EPA method 310.1. Determination of Alkalinity by Metrohm automated titration analyser.	PM0	No preparation is required.	Yes			
TM76	Modified US EPA method 120.1. Determination of Specific Conductance by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM89	Modified USEPA method OIA-1667. Determination of cyanide by Flow Injection Analyser. Where WAD cyanides are required a Ligand displacement step is carried out before analysis.	PM0	No preparation is required.				
TM149	Determination of Pesticides by Large Volume Injection on GC Triple Quad MS, based upon USEPA method 8270	PM30	Water samples are extracted with solvent using a magnetic stirrer to create a vortex.				
TM170	Determination of Trace Metal elements by ICP-MS (Inductively Coupled Plasma - Mass Spectrometry) modified USEPA 200.8/6020A and BS EN ISO 17294-2 2016	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			



[Redacted]

Registered Address [Redacted]

[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]

Dalradian Gold Ltd

[Redacted]
[Redacted]
[Redacted]

Tel: [Redacted]
Fax: [Redacted]



Attention : [Redacted]

Date : 23rd July, 2018

Your reference : DCS

Our reference : Test Report 18/10790 Batch 1 18/10792 Batch 1

Location : Curraghinalt

Date samples received :

Status : Final report

Issue : 1

Compiled By:

[Redacted]

[Redacted] **BSc**
Project Manager

Client Name: Dalradian Gold Ltd
Reference: DCS
Location: Curraghinalt
Contact:

Report : Liquid

Liquids/products: V=40ml vial, G=glass bottle, P=plastic bottle
 H=H₂SO₄, Z=ZnAc, N=NaOH, HN=HNO₃

Job No.	18/10792	18/10792	18/10792	18/10790	18/10790	18/10790	18/10792						
Sample No.	1-5	6-10	11-15	1-8	9-16	17-24	16-20						
Sample ID	DCS1	DCS2	DCS3	DCS4	DCS5	DCS6	DCS7						
Depth													
COC No / misc													
Containers	HN NB P BOD G	HN NB P BOD G	HN NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	HN NB P BOD G						
Sample Date	09/07/2018	09/07/2018	09/07/2018	09/07/2018	09/07/2018	09/07/2018	09/07/2018						
Sample Type	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water						
Batch Number	1	1	1	1	1	1	1						
Date of Receipt	10/07/2018	10/07/2018	10/07/2018	10/07/2018	10/07/2018	10/07/2018	10/07/2018						
											LOD/LOR	Units	Method No.
Dissolved Arsenic #	3.1	<0.9	<0.9	3.9	1.4	<0.9	<0.9				<0.9	ug/l	TM30/PM14
Dissolved Cadmium #	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03				<0.03	ug/l	TM30/PM14
Total Dissolved Chromium #	<0.2	<0.2	<0.2	0.8	<0.2	<0.2	<0.2				<0.2	ug/l	TM30/PM14
Dissolved Copper #	6	<3	<3	<3	<3	<3	<3				<3	ug/l	TM30/PM14
Total Dissolved Iron #	3.0900	0.0244	0.5419	0.6170	0.6968	<0.0047	0.0181				<0.0047	mg/l	TM30/PM14
Dissolved Lead #	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4				<0.4	ug/l	TM30/PM14
Dissolved Mercury #	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5				<0.5	ug/l	TM30/PM14
Dissolved Nickel #	0.7	2.2	2.2	0.2	<0.2	<0.2	2.7				<0.2	ug/l	TM30/PM14
Dissolved Zinc #	5.1	5.1	2.9	1.5	2.5	<1.5	2.9				<1.5	ug/l	TM30/PM14
Total Hardness Dissolved (as CaCO ₃)	33	178	146	45	48	<1	178				<1	mg/l	TM30/PM14
Hexavalent Chromium #	<0.006	<0.006	<0.006	<0.006	<0.006	<0.006	<0.006				<0.006	mg/l	TM38/PM0
Total Dissolved Chromium III	<6	<6	<6	<6	<6	<6	<6				<6	ug/l	TM0/PM0
BOD (Settled) #	<1	<1	<1	<1	<1	<1	<1				<1	mg/l	TM58/PM0
pH #	6.26	7.42	7.98	6.14	6.20	5.61	8.08				<0.01	pH units	TM73/PM0
Total Suspended Solids #	<10	<10	<10	<10	<10	<10	<10				<10	mg/l	TM37/PM0

Please see attached notes for all abbreviations and acronyms

NOTES TO ACCOMPANY ALL SCHEDULES AND REPORTS

JE Job No.: 18/10790 18/10792

SOILS

Please note we are only MCERTS accredited (UK soils only) for sand, loam and clay and any other matrix is outside our scope of accreditation.

Where an MCERTS report has been requested, you will be notified within 48 hours of any samples that have been identified as being outside our MCERTS scope. As validation has been performed on clay, sand and loam, only samples that are predominantly these matrices, or combinations of them will be within our MCERTS scope. If samples are not one of a combination of the above matrices they will not be marked as MCERTS accredited.

It is assumed that you have taken representative samples on site and require analysis on a representative subsample. Stones will generally be included unless we are requested to remove them.

All samples will be discarded one month after the date of reporting, unless we are instructed to the contrary.

If you have not already done so, please send us a purchase order if this is required by your company.

Where appropriate please make sure that our detection limits are suitable for your needs, if they are not, please notify us immediately.

All analysis is reported on a dry weight basis unless stated otherwise. Results are not surrogate corrected. Samples are dried at 35°C ±5°C unless otherwise stated. Moisture content for CEN Leachate tests are dried at 105°C ±5°C.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

Where a CEN 10:1 ZERO Headspace VOC test has been carried out, a 10:1 ratio of water to wet (as received) soil has been used.

% Asbestos in Asbestos Containing Materials (ACMs) is determined by reference to HSG 264 The Survey Guide - Appendix 2 : ACMs in buildings listed in order of ease of fibre release.

Negative Neutralization Potential (NP) values are obtained when the volume of NaOH (0.1N) titrated (pH 8.3) is greater than the volume of HCl (1N) to reduce the pH of the sample to 2.0 - 2.5. Any negative NP values are corrected to 0.

The calculation of Pyrite content assumes that all oxidisable sulphides present in the sample are pyrite. This may not be the case. The calculation may be an overestimate when other sulphides such as Barite (Barium Sulphate) are present.

WATERS

Please note we are not a UK Drinking Water Inspectorate (DWI) Approved Laboratory .

ISO17025 accreditation applies to surface water and groundwater and usually one other matrix which is analysis specific, any other liquids are outside our scope of accreditation.

As surface waters require different sample preparation to groundwaters the laboratory must be informed of the water type when submitting samples.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

DEVIATING SAMPLES

Samples must be received in a condition appropriate to the requested analyses. All samples should be submitted to the laboratory in suitable containers with sufficient ice packs to sustain an appropriate temperature for the requested analysis. If this is not the case you will be informed and any test results that may be compromised highlighted on your deviating samples report.

SURROGATES

Surrogate compounds are added during the preparation process to monitor recovery of analytes. However low recovery in soils is often due to peat, clay or other organic rich matrices. For waters this can be due to oxidants, surfactants, organic rich sediments or remediation fluids. Acceptable limits for most organic methods are 70 - 130% and for VOCs are 50 - 150%. When surrogate recoveries are outside the performance criteria but the associated AQC passes this is assumed to be due to matrix effect. Results are not surrogate corrected.

DILUTIONS

A dilution suffix indicates a dilution has been performed and the reported result takes this into account. No further calculation is required.

BLANKS

Where analytes have been found in the blank, the sample will be treated in accordance with our laboratory procedure for dealing with contaminated blanks.

NOTE

Data is only reported if the laboratory is confident that the data is a true reflection of the samples analysed. Data is only reported as accredited when all the requirements of our Quality System have been met. In certain circumstances where all the requirements of the Quality System have not been met, for instance if the associated AQC has failed, the reason is fully investigated and documented. The sample data is then evaluated alongside the other quality control checks performed during analysis to determine its suitability. Following this evaluation, provided the sample results have not been effected, the data is reported but accreditation is removed. It is a UKAS requirement for data not reported as accredited to be considered indicative only, but this does not mean the data is not valid.

Where possible, and if requested, samples will be re-extracted and a revised report issued with accredited results. Please do not hesitate to contact the laboratory if further details are required of the circumstances which have led to the removal of accreditation.

REPORTS FROM THE ██████████ LABORATORY

Any method number not prefixed with SA has been undertaken in our UK laboratory unless reported as subcontracted.

Please include all sections of this report if it is reproduced

All solid results are expressed on a dry weight basis unless stated otherwise.

ABBREVIATIONS and ACRONYMS USED

#	ISO17025 (UKAS Ref No. 4225) accredited - UK.
SA	ISO17025 (SANAS Ref No.T0729) accredited - South Africa.
B	Indicates analyte found in associated method blank.
DR	Dilution required.
M	MCERTS accredited.
NA	Not applicable
NAD	No Asbestos Detected.
ND	None Detected (usually refers to VOC and/SVOC TICs).
NDP	No Determination Possible
SS	Calibrated against a single substance
SV	Surrogate recovery outside performance criteria. This may be due to a matrix effect.
W	Results expressed on as received basis.
+	AQC failure, accreditation has been removed from this result, if appropriate, see 'Note' on previous page.
++	Result outside calibration range, results should be considered as indicative only and are not accredited.
*	Analysis subcontracted to an [REDACTED] approved laboratory.
AD	Samples are dried at 35°C ±5°C
CO	Suspected carry over
LOD/LOR	Limit of Detection (Limit of Reporting) in line with ISO 17025 and MCERTS
ME	Matrix Effect
NFD	No Fibres Detected
BS	AQC Sample
LB	Blank Sample
N	Client Sample
TB	Trip Blank Sample
OC	Outside Calibration Range

Job No: 18/10790 18/10792

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/S ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM0	Not available	PM0	No preparation is required.				
TM5	Modified USEPA 8015B method for the determination of solvent Extractable Petroleum Hydrocarbons (EPH) with carbon banding within the range C8-C40 GC-FID.	PM30	Water samples are extracted with solvent using a magnetic stirrer to create a vortex.	Yes			
TM20	Modified BS 1377-3: 1990/USEPA 160.3 Gravimetric determination of Total Dissolved Solids/Total Solids	PM0	No preparation is required.	Yes			
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.				
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			
TM37	Modified methods USEPA 160.2, EN872:2005 and SMWW 2540D. Gravimetric determination of Total Suspended Solids. Sample is filtered through a 1.5µm pore size glass fibre filter and the resulting residue is dried and weighed.	PM0	No preparation is required.	Yes			
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.				
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.	Yes			
TM57	Modified US EPA Method 410.4. Chemical Oxygen Demand is determined by hot digestion with Potassium Dichromate and measured spectrophotometrically.	PM0	No preparation is required.	Yes			
TM58	APHA Standard Methods for the extraction of water and waste water (SMEWW) 5210B. Measurement of Biochemical Oxygen Demand. When cBOD (Carbonaceous BOD) is requested a nitrification inhibitor is added which prevents the oxidation of reduced forms of nitrogen, such as ammonia, nitrite and organic nitrogen which exert a nitrogenous demand.	PM0	No preparation is required.	Yes			

Job No: 18/10790 18/10792

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/S ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM60	Modified USEPA 9060. Determination of TOC by calculation from Total Carbon and Inorganic Carbon using a TOC analyser, the carbon in the sample is converted to CO ₂ and then passed through a non-dispersive infrared gas analyser (NDIR).	PM0	No preparation is required.	Yes			
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.				
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.	Yes			
TM73	Modified US EPA methods 150.1 and 9045D and BS1377:1990. Determination of pH by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM75	Modified US EPA method 310.1. Determination of Alkalinity by Metrohm automated titration analyser.	PM0	No preparation is required.	Yes			
TM76	Modified US EPA method 120.1. Determination of Specific Conductance by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM89	Modified USEPA method OIA-1667. Determination of cyanide by Flow Injection Analyser. Where WAD cyanides are required a Ligand displacement step is carried out before analysis.	PM0	No preparation is required.				
TM170	Determination of Trace Metal elements by ICP-MS (Inductively Coupled Plasma - Mass Spectrometry) modified USEPA 200.8/6020A and BS EN ISO 17294-2 2016	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			
TM173	Analysis of fluoride by ISE (Ion Selective Electrode) using modified ISE method 340.2	PM0	No preparation is required.				



[Redacted]

Registered Address [Redacted]

[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]

Dalradian Gold Ltd

[Redacted]
[Redacted]
[Redacted]

Tel: [Redacted]
Fax: [Redacted]



Attention : [Redacted]

Date : 20th August, 2018

Your reference : DCS


Our reference : Test Report 18/12387 Batch 1 18/12382 Batch 1

Location : Curraghinalt

Date samples received :

Status : Final report

Issue : 2



Compiled By:

[Redacted]

[Redacted] **BSc**
Project Manager

Client Name: Dalradian Gold Ltd
Reference: DCS
Location: Curraghinalt
Contact:

Report : Liquid

Liquids/products: V=40ml vial, G=glass bottle, P=plastic bottle
 H=H₂SO₄, Z=ZnAc, N=NaOH, HN=HNO₃

Job No.	18/12382	18/12382	18/12382	18/12387	18/12387	18/12387	18/12382							
Sample No.	1-5	6-10	11-15	1-8	9-16	17-24	16-20							
Sample ID	DCS1	DCS2	DCS3	DCS4	DCS5	DCS6	DCS7							
Depth														
COC No / misc														
Containers	HN NB P BOD G	HN NB P BOD G	HN NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	V H HN N NB P BOD G	HN NB P BOD G							
Sample Date	06/08/2018	06/08/2018	06/08/2018	06/08/2018	06/08/2018	06/08/2018	06/08/2018							
Sample Type	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water	Surface Water							
Batch Number	1	1	1	1	1	1	1							
Date of Receipt	07/08/2018	07/08/2018	07/08/2018	07/08/2018	07/08/2018	07/08/2018	07/08/2018							
											LOD/LOR	Units	Method No.	
Dissolved Arsenic #	1.8	<0.9	<0.9	2.0	1.8	<0.9	<0.9				<0.9	ug/l	TM30/PM14	
Dissolved Cadmium #	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03				<0.03	ug/l	TM30/PM14	
Total Dissolved Chromium #	0.3	1.1	<0.2	0.7	0.3	<0.2	1.4				<0.2	ug/l	TM30/PM14	
Dissolved Copper #	5	<3	4	<3	<3	<3	<3				<3	ug/l	TM30/PM14	
Total Dissolved Iron #	3.4510	0.0141	1.9500	0.9438	0.9051	<0.0047	0.0114				<0.0047	mg/l	TM30/PM14	
Dissolved Lead #	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4	<0.4				<0.4	ug/l	TM30/PM14	
Dissolved Mercury #	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5				<0.5	ug/l	TM30/PM14	
Dissolved Nickel #	0.3	3.1	1.7	1.7	1.6	<0.2	2.3				<0.2	ug/l	TM30/PM14	
Dissolved Zinc #	6.8	5.9	7.6	<1.5	3.2	<1.5	5.2				<1.5	ug/l	TM30/PM14	
Total Hardness Dissolved (as CaCO ₃)	23	170	85	36	38	<1	170				<1	mg/l	TM30/PM14	
Hexavalent Chromium #	<6	<6	<6	<6	<6	<6	<6				<6	ug/l	TM38/PM0	
Total Dissolved Chromium III	<6	<6	<6	<6	<6	<6	<6				<6	ug/l	TM0/PM0	
BOD (Settled) #	2	<1	<1	<1	<1	2	<1				<1	mg/l	TM58/PM0	
pH #	6.22	7.64	7.71	7.74	6.28	5.34	8.10				<0.01	pH units	TM73/PM0	
Total Suspended Solids #	<10	<10	<10	<10	<10	<10	<10				<10	mg/l	TM37/PM0	

Please see attached notes for all abbreviations and acronyms

NOTES TO ACCOMPANY ALL SCHEDULES AND REPORTS

JE Job No.: 18/12387 18/12382

SOILS

Please note we are only MCERTS accredited (UK soils only) for sand, loam and clay and any other matrix is outside our scope of accreditation.

Where an MCERTS report has been requested, you will be notified within 48 hours of any samples that have been identified as being outside our MCERTS scope. As validation has been performed on clay, sand and loam, only samples that are predominantly these matrices, or combinations of them will be within our MCERTS scope. If samples are not one of a combination of the above matrices they will not be marked as MCERTS accredited.

It is assumed that you have taken representative samples on site and require analysis on a representative subsample. Stones will generally be included unless we are requested to remove them.

All samples will be discarded one month after the date of reporting, unless we are instructed to the contrary.

If you have not already done so, please send us a purchase order if this is required by your company.

Where appropriate please make sure that our detection limits are suitable for your needs, if they are not, please notify us immediately.

All analysis is reported on a dry weight basis unless stated otherwise. Results are not surrogate corrected. Samples are dried at 35°C ±5°C unless otherwise stated. Moisture content for CEN Leachate tests are dried at 105°C ±5°C.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

Where a CEN 10:1 ZERO Headspace VOC test has been carried out, a 10:1 ratio of water to wet (as received) soil has been used.

% Asbestos in Asbestos Containing Materials (ACMs) is determined by reference to HSG 264 The Survey Guide - Appendix 2 : ACMs in buildings listed in order of ease of fibre release.

Negative Neutralization Potential (NP) values are obtained when the volume of NaOH (0.1N) titrated (pH 8.3) is greater than the volume of HCl (1N) to reduce the pH of the sample to 2.0 - 2.5. Any negative NP values are corrected to 0.

The calculation of Pyrite content assumes that all oxidisable sulphides present in the sample are pyrite. This may not be the case. The calculation may be an overestimate when other sulphides such as Barite (Barium Sulphate) are present.

WATERS

Please note we are not a UK Drinking Water Inspectorate (DWI) Approved Laboratory .

ISO17025 accreditation applies to surface water and groundwater and usually one other matrix which is analysis specific, any other liquids are outside our scope of accreditation.

As surface waters require different sample preparation to groundwaters the laboratory must be informed of the water type when submitting samples.

Where Mineral Oil or Fats, Oils and Grease is quoted, this refers to Total Aliphatics C10-C40.

DEVIATING SAMPLES

Samples must be received in a condition appropriate to the requested analyses. All samples should be submitted to the laboratory in suitable containers with sufficient ice packs to sustain an appropriate temperature for the requested analysis. If this is not the case you will be informed and any test results that may be compromised highlighted on your deviating samples report.

SURROGATES

Surrogate compounds are added during the preparation process to monitor recovery of analytes. However low recovery in soils is often due to peat, clay or other organic rich matrices. For waters this can be due to oxidants, surfactants, organic rich sediments or remediation fluids. Acceptable limits for most organic methods are 70 - 130% and for VOCs are 50 - 150%. When surrogate recoveries are outside the performance criteria but the associated AQC passes this is assumed to be due to matrix effect. Results are not surrogate corrected.

DILUTIONS

A dilution suffix indicates a dilution has been performed and the reported result takes this into account. No further calculation is required.

BLANKS

Where analytes have been found in the blank, the sample will be treated in accordance with our laboratory procedure for dealing with contaminated blanks.

NOTE

Data is only reported if the laboratory is confident that the data is a true reflection of the samples analysed. Data is only reported as accredited when all the requirements of our Quality System have been met. In certain circumstances where all the requirements of the Quality System have not been met, for instance if the associated AQC has failed, the reason is fully investigated and documented. The sample data is then evaluated alongside the other quality control checks performed during analysis to determine its suitability. Following this evaluation, provided the sample results have not been effected, the data is reported but accreditation is removed. It is a UKAS requirement for data not reported as accredited to be considered indicative only, but this does not mean the data is not valid.

Where possible, and if requested, samples will be re-extracted and a revised report issued with accredited results. Please do not hesitate to contact the laboratory if further details are required of the circumstances which have led to the removal of accreditation.

REPORTS FROM THE ██████████ LABORATORY

Any method number not prefixed with SA has been undertaken in our UK laboratory unless reported as subcontracted.

Please include all sections of this report if it is reproduced

All solid results are expressed on a dry weight basis unless stated otherwise.

ABBREVIATIONS and ACRONYMS USED

#	ISO17025 (UKAS Ref No. 4225) accredited - UK.
SA	ISO17025 (SANAS Ref No.T0729) accredited - South Africa.
B	Indicates analyte found in associated method blank.
DR	Dilution required.
M	MCERTS accredited.
NA	Not applicable
NAD	No Asbestos Detected.
ND	None Detected (usually refers to VOC and/SVOC TICs).
NDP	No Determination Possible
SS	Calibrated against a single substance
SV	Surrogate recovery outside performance criteria. This may be due to a matrix effect.
W	Results expressed on as received basis.
+	AQC failure, accreditation has been removed from this result, if appropriate, see 'Note' on previous page.
++	Result outside calibration range, results should be considered as indicative only and are not accredited.
*	Analysis subcontracted to an [REDACTED] approved laboratory.
AD	Samples are dried at 35°C ±5°C
CO	Suspected carry over
LOD/LOR	Limit of Detection (Limit of Reporting) in line with ISO 17025 and MCERTS
ME	Matrix Effect
NFD	No Fibres Detected
BS	AQC Sample
LB	Blank Sample
N	Client Sample
TB	Trip Blank Sample
OC	Outside Calibration Range

Job No: 18/12387 18/12382

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM0	Not available	PM0	No preparation is required.				
TM5	Modified USEPA 8015B method for the determination of solvent Extractable Petroleum Hydrocarbons (EPH) with carbon banding within the range C8-C40 GC-FID.	PM30	Water samples are extracted with solvent using a magnetic stirrer to create a vortex.	Yes			
TM20	Modified BS 1377-3: 1990/USEPA 160.3 Gravimetric determination of Total Dissolved Solids/Total Solids	PM0	No preparation is required.	Yes			
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.				
TM30	Determination of Trace Metal elements by ICP-OES (Inductively Coupled Plasma - Optical Emission Spectrometry). Modified US EPA Method 200.7, 6010B and BS EN ISO 11885 2009	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			
TM37	Modified methods USEPA 160.2, EN872:2005 and SMWW 2540D. Gravimetric determination of Total Suspended Solids. Sample is filtered through a 1.5µm pore size glass fibre filter and the resulting residue is dried and weighed.	PM0	No preparation is required.	Yes			
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.				
TM38	Soluble Ion analysis using Discrete Analyser. Modified US EPA methods 325.2 (Chloride), 375.4 (Sulphate), 365.2 (o-Phosphate), 353.1 (TON), 354.1 (Nitrite), 350.1 (NH4+), 7196A (Hex Cr)	PM0	No preparation is required.	Yes			
TM57	Modified US EPA Method 410.4. Chemical Oxygen Demand is determined by hot digestion with Potassium Dichromate and measured spectrophotometrically.	PM0	No preparation is required.	Yes			
TM58	APHA Standard Methods for the extraction of water and waste water (SMEWW) 5210B. Measurement of Biochemical Oxygen Demand. When cBOD (Carbonaceous BOD) is requested a nitrification inhibitor is added which prevents the oxidation of reduced forms of nitrogen, such as ammonia, nitrite and organic nitrogen which exert a nitrogenous demand.	PM0	No preparation is required.	Yes			

Job No: 18/12387 18/12382

Test Method No.	Description	Prep Method No. (if appropriate)	Description	ISO 17025 (UKAS/S ANAS)	MCERTS (UK soils only)	Analysis done on As Received (AR) or Dried (AD)	Reported on dry weight basis
TM60	TC/TOC analysis of Waters by High Temperature Combustion followed by NDIR detection. Based on the following modified standard methods: USEPA 9060, APHA Standard Methods for Examination of Water and Wastewater 5310B, ASTM D 7573, and USEPA 415.1.	PM0	No preparation is required.	Yes			
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.				
TM61	Modified US EPA methods 245.7 and 200.7. Determination of Mercury by Cold Vapour Atomic Fluorescence.	PM0	No preparation is required.	Yes			
TM73	Modified US EPA methods 150.1 and 9045D and BS1377:1990. Determination of pH by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM75	Modified US EPA method 310.1. Determination of Alkalinity by Metrohm automated titration analyser.	PM0	No preparation is required.	Yes			
TM76	Modified US EPA method 120.1. Determination of Specific Conductance by Metrohm automated probe analyser.	PM0	No preparation is required.	Yes			
TM89	Modified USEPA method OIA-1667. Determination of cyanide by Flow Injection Analyser. Where WAD cyanides are required a Ligand displacement step is carried out before analysis.	PM0	No preparation is required.				
TM170	Determination of Trace Metal elements by ICP-MS (Inductively Coupled Plasma - Mass Spectrometry) modified USEPA 200.8/6020A and BS EN ISO 17294-2 2016	PM14	Analysis of waters and leachates for metals by ICP OES/ICP MS. Samples are filtered for dissolved metals and acidified if required.	Yes			
TM173	Analysis of fluoride by ISE (Ion Selective Electrode) using modified ISE method 340.2	PM0	No preparation is required.				

Appendix C

YSI Calibration Certificate

OUTWARDS CHECKLIST

YSIPRO Sales Checklist and Calibration

YSI & Cable Serial Numbers: 17L101825 / 17L100306

	Reading	Target	Acceptable	Pass
Temp	16.4	Ref: 16.5	± 1°C	✓
pH7mv	-1.9	0.0	0 ± 50	✓
pH4mv	169.0	177	177 ± 50	✓
pH Slope	170.9	177	162 - 180	✓
Cond. Cell Constant	4.9	5	4.6 - 5.4	✓
Redox Offset	5.0	0.0	±50.0	✓
DO Gain	Pass or fail determined by the meter			✓

*Calibrated to manufacturers standards

All parameters were within acceptable range on the day of despatch; however we do recommend that the instrument is calibrated daily to ensure accurate readings.


Checklist

Comments

- | | | |
|-------------------------------------|-------------------------------------|-------|
| <input checked="" type="checkbox"/> | YSI PRO meter & Hand strap | _____ |
| <input checked="" type="checkbox"/> | Quatro Cable Assy | _____ |
| <input checked="" type="checkbox"/> | Probe Guard / Sleeve | _____ |
| <input checked="" type="checkbox"/> | Calibration Cup | _____ |
| <input checked="" type="checkbox"/> | Manual/Data Manager CD | _____ |
| <input checked="" type="checkbox"/> | Quick Start Guide | _____ |
| <input checked="" type="checkbox"/> | Hard Case | N/A |
| <input checked="" type="checkbox"/> | Flow Cell (including 2 o-rings) | N/A |
| <input checked="" type="checkbox"/> | 2 x Small & Large Flow Cell Nipples | N/A |
| <input checked="" type="checkbox"/> | DO Membrane and Electrolyte kit | _____ |
| <input checked="" type="checkbox"/> | Warranty Sticker Intact | _____ |
| <input checked="" type="checkbox"/> | Maintenance Cleaning Kit | _____ |
| <input checked="" type="checkbox"/> | Cable Management Kit | _____ |

Signed: 

Date: 12/12/17

Name: 

Cross checked contents initials: 